


JUMAG

THE "GRAVIT" WHEEL FILTER

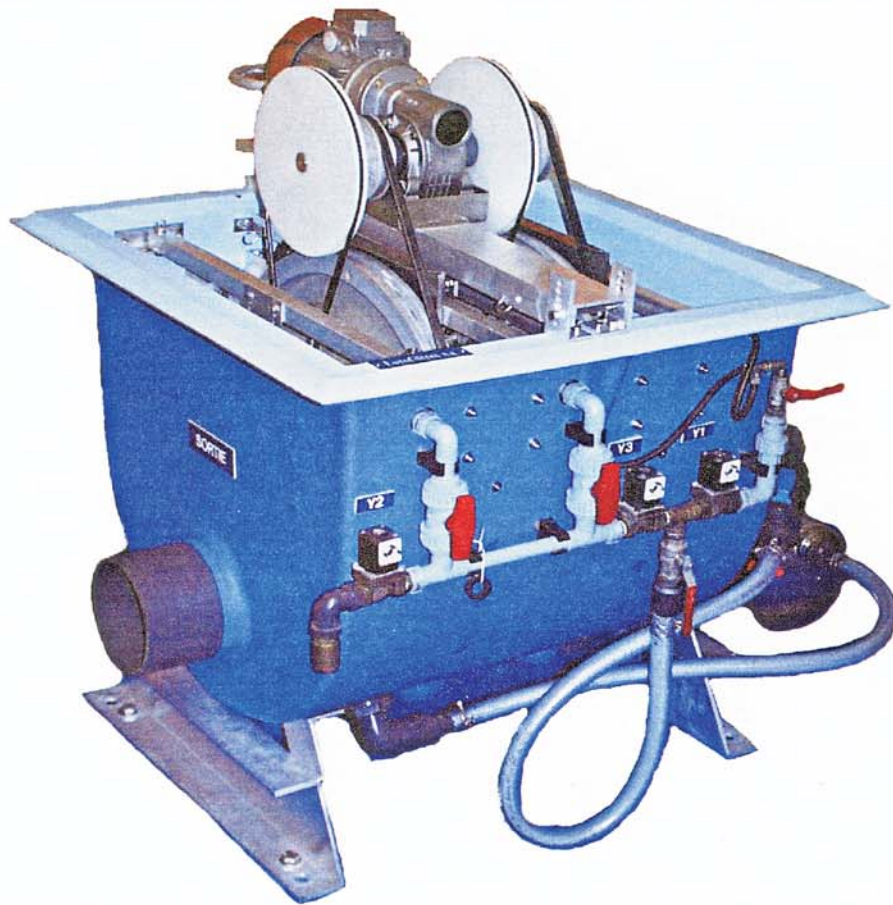

HYDRAULIC CAPACITIES OF THE GRAVIT FILTER DEPENDING ON THE FILTER LEVELS OF THE WHEELS

Mesh sizes* in micron	FR 05 FLOW M3/h	FR 10 FLOW M3/h	FR 10x2 FLOW M3/h
40	5	40	70
63	6	60	120
80	7	70	130
100	8	80	150
500	10	150	250

The above figures are to be regarded as indications for a concentration of solid particles of 100mg/l in suspension. The indicated flow capacities may vary depending on several factors, like shape, size and nature of the particles to filter.

*The mesh screens are in 304L or 316L